

# GripplE Plus Range

A comprehensive range of wire joiners and tensioners to suit most fence wires, trellis wires or support wires.

## ADVANTAGES


- Join and tension in one.
- 4 times faster than knotting or other traditional methods.
- The simple push fit maintains the inherent strength of the wire.
- High load holding.
- Easy maintenance - one-way movement always allows for re-tensioning.
- Optimum corrosion resistance.
- Adjustment feature.
- Use with the GripplE Torq Tensioning Tool for easy installation.




## INSTALLATION




Insert 1st wire

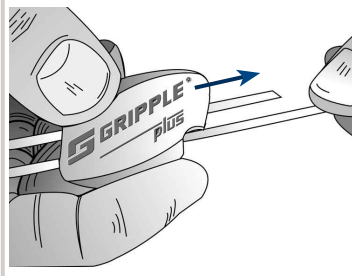

Insert 2nd wire

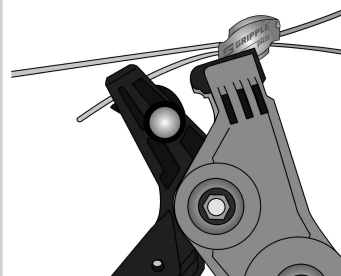

Tension

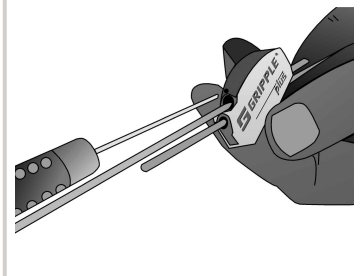

Adjust

- Insert the first wire, then the second to make a wire join.
- Tension with the GripplE Tensioning Tool.
- Use on plain wire, barbed wire or stock fencing.
- Use the setting key for adjustment prior to tensioning.
- Terminate at a post by looping the wire around the post and sliding the GripplE along the wire. Then insert the tail wire back into the unit.

## SPECIFICATION

Product	Wire Diameter (mm)	Wire Gauge - ga	Load kg
GripplE Plus SMALL	1.40 - 2.20	17 - 13	300kg / 600lb
GripplE Plus MEDIUM	2.00 - 3.25	14 - 10	400kg / 880lb
GripplE Plus LARGE	3.25 - 4.20	10 - 7 1/2	600kg / 1320lb

All are available in bags, bulk, Starter Packs and Tools Deals (with special offers on Starter Packs and Tool Deals).

## TIPS

- Always leave a wire tail of at least 75mm / 3" to allow for re-tensioning.
- Secure tail wires with the GripplE Twister.
- If the GripplE unit is pushed onto the wire too far (pre-load), use the setting key to allow the unit to move backwards.